

# Speed Queen® Multi-Housing

## Quantum® Energy Efficient Peak Performance Commercial Top Load Washer

Rear Control




### BUILT FOR RELIABLE PERFORMANCE

- Touch pad control with sound annunciator
- 27 cycle selections
- U.S. DOE compliance for energy and water efficiencies
- Extract speed of 710 RPMs spins clothes out drier
- Secured coin vault meter case
- Commercial-grade stainless steel or porcelain enamel washtub
- Automatic balancing suspension system

### QUANTUM CONTROL

- Easy-to-read digital display
- Cycle programming flexibility
- Multi-level vend pricing
- Individual cycle modifier keys
- Card and coin transactions
- Wash Alert™ with Service Alert capable

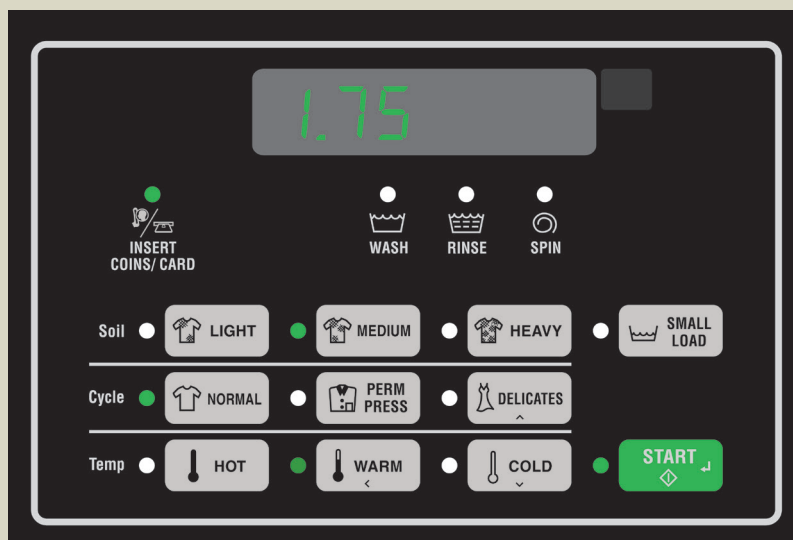

# QUANTUM® COMMERCIAL TOP LOAD WASHER SPECIFICATIONS

MODELS AND ACTIVATION (NOTE: COIN BOX SOLD SEPARATELY)	SWNNC2AP113TW04	SWNNC2HP113TW04	SWNNY2AP113TW04	SWNNY2HP113TW04	SWNNWY2AP113TW04	SWNNWY2HP113TW04	SWNNX2HP113TW04
Available Control Location	Rear	Rear	Rear	Rear	Rear	Rear	Rear
Activation Type	Coin Installed	Coin Installed	Prep for Card	Prep for Card	Prep for Card	Prep for Card	Prep for Coin
Meter Case	Standard Capacity	Standard Capacity	-	-	-	-	Standard Capacity
Capacity - lb (kg)	14 (6.4)	14 (6.4)	14 (6.4)	14 (6.4)	14 (6.4)	14 (6.4)	14 (6.4)
Cylinder Volume - cu. Ft. (liters)	2.9 (82)	2.9 (82)	2.9 (82)	2.9 (82)	2.9 (82)	2.9 (82)	2.9 (82)
Width - in (mm)	25 5/8 (651)	25 5/8 (651)	25 5/8 (651)	25 5/8 (651)	25 5/8 (651)	25 5/8 (651)	25 5/8 (651)
Depth - in (mm)	28 (711)	28 (711)	28 (711)	28 (711)	28 (711)	28 (711)	28 (711)
Height - in (mm)	43 (1092)	43 (1092)	43 (1092)	43 (1092)	43 (1092)	43 (1092)	43 (1092)
Spin Speed G-Force (RPM)	150 (710)	150 (710)	150 (710)	150 (710)	150 (710)	150 (710)	150 (710)
Motor Size - HP (kw)	1/2 (0.37)	1/2 (0.37)	1/2 (0.37)	1/2 (0.37)	1/2 (0.37)	1/2 (0.37)	1/2 (0.37)
Water Consumption per Cycle - g (liter)	18.1 (68.5)	18.1 (68.5)	18.1 (68.5)	18.1 (68.5)	18.1 (68.5)	18.1 (68.5)	18.1 (68.5)
WF (Water Factor) gal/ft³ (Liters/Liter/cycle)	6.55 (0.7)	6.55 (0.7)	6.55 (0.7)	6.55 (0.7)	6.55 (0.7)	6.55 (0.7)	6.55 (0.7)
MEF (Modified Energy Factor) ft³/kWh/cycle (Liters/kWh/cycle)	1.60 (45.3)	1.60 (45.3)	1.60 (45.3)	1.60 (45.3)	1.60 (45.3)	1.60 (45.3)	1.60 (45.3)
Available Water Temperatures	Hot, Warm, Cold	Hot, Warm, Cold	Hot, Warm, Cold	Hot, Warm, Cold	Hot, Warm, Cold	Hot, Warm, Cold	Hot, Warm, Cold
Available Cycles	Light, Medium, Heavy, Small Load, Normal, Perm Press, Delicate						
Water Pressure - PSI (Bar)	20-120 (1.4/8.3)	20-120 (1.4/8.3)	20-120 (1.4/8.3)	20-120 (1.4/8.3)	20-120 (1.4/8.3)	20-120 (1.4/8.3)	20-120 (1.4/8.3)
Cycle Indicator Lights	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Cylinder Finish	Porcelain	Stainless Steel	Porcelain	Stainless Steel	Porcelain	Stainless Steel	Stainless Steel
Available Colors	White	White	White	White	White	White	White
Available Electrical Requirements (v/Hz/Ph-Amp)	120/60/1 - 15 Amp						
Net Weight - lb (kg)	190 (86)	190 (86)	190 (86)	190 (86)	190 (86)	190 (86)	190 (86)
Shipping Weight - lb (kg)	210 (95)	210 (95)	210 (95)	210 (95)	210 (95)	210 (95)	210 (95)
Shipping Width - in (mm)	27 1/2 (699)	27 1/2 (699)	27 1/2 (699)	27 1/2 (699)	27 1/2 (699)	27 1/2 (699)	27 1/2 (699)
Shipping Depth - in (mm)	30 (762)	30 (762)	30 (762)	30 (762)	30 (762)	30 (762)	30 (762)
Shipping Height - in (mm)	44 1/4 (1124)	44 1/4 (1124)	44 1/4 (1124)	44 1/4 (1124)	44 1/4 (1124)	44 1/4 (1124)	44 1/4 (1124)
Wireless Network Board	--	--	--	--	Yes	Yes	--
Available Agency Approvals	cULus	cULus	cULus	cULus	cULus	cULus	cULus

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications are subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2008. Printed in the USA.

